



## IoT and WSN based Effluent Treatment Plant Monitoring System

---

Md. Saikat Islam Khan, Anichur Rahman, Sifatul Islam,  
Mostofa Kamal Nasir, Shahab S. Band and Amir Mosavi

EasyChair preprints are intended for rapid dissemination of research results and are integrated with the rest of EasyChair.

February 25, 2021

## **IoT and WSN based Effluent Treatment Plant Monitoring System**

**Md. Saikat Islam Khan<sup>1,2</sup>, Anichur Rahman<sup>1,2</sup>, Sifatul Islam<sup>1,2</sup>,  
Mostofa Kamal Nasir<sup>1</sup>, Shahab S. Band<sup>3,4</sup>, Amir Mosavi<sup>5\*</sup>**

<sup>1</sup>Department of Computer Science and Engineering, Mawlana Bhashani Science and Technology University, Science treet 2., 172534 Tangail, Bangladesh, kamal@mbstu.ac.bd

<sup>2</sup>Department of Computer Science and Engineering, National Institute of Textile Engineering and Research, Savar, Savar str.1, Dhaka 23981273, Bangladesh, {anis\_cse, b.khan\_cse, and s.islam\_cse} @niter.edu.bd

<sup>3</sup>Future Technology Research Center, College of Future, National Yunlin University of Science and Technology, 123 University Road, Section 3, Douliou, Yunlin 64002, Taiwan; shamshirbands@yuntech.edu.tw

<sup>4</sup>John von Neumann Faculty of Informatics, Obuda University, Becsi Str. 94-96, 1431 Budapest, Hungary, amir.mosavi@nik.uni-obuda.hu

---

**Abstract:** Contaminated water became a major issue for our country from the last few decades. One of the main reasons behind this scenario is urbanization and industrialization. Every industry should have an Effluent Treatment Plant (ETP) for treating industrial wastewater and safe disposal to the environment. We implement a system that monitors whether an industry uses ETP or not. To monitor ETP, we need to monitor the untreated waste water quality. The traditional way offers us a method that is time-consuming and inefficient. To solve this problem, we adopt a model based on Wireless Sensor Networking (WSN), which allows us to keep track of the water quality parameters in real-time. This paper proposes a water quality monitoring system that uses WSN and Internet of Things (IoT) based devices to monitor different parameters of water: temperature by a temperature sensor, turbidity by a turbidity sensor, and pH by a pH sensor. Moreover, the microcontroller of Arduino Uno R3 collects the parameter values from these sensors and transmits the values to the IoT based cloud server using the GSM module. The GSM module also used to alert the supervisors by sending SMS in case of an emergency. Integrating modules such as sensors, Arduino Uno R3, GSM module, enhances the purpose of the desired system. Finally, we calculate the Water Quality Index (WQI) for the pH and turbidity data to report the water quality status. Also, we compare the WQI status with our cloud status, and it shows an excellent performance.

**Keywords:** Water Quality, WSN, IoT, Sensor, GSM Module, Real-time application, WQI.

---

## 1 Introduction

Water is one of the most vital assets for humankind. Without water, no plants or animals on earth would survive. The industry has been growing every year on the back of spiraling demand from domestic and export markets. But because of the growing rate of the industry in developing countries like Bangladesh, water is constantly being polluted. Water is mostly being polluted because of the industries discharging untreated waste and effluent into the rivers, canal. Water related diseases cause 3.4 million deaths each year across the globe, according to the WHO Water Day Report. Defiled water is also responsible for the degradation of agriculture land, soil fertility loss, and increases pressure on groundwater. About 200 rivers of Bangladesh directly or obliquely received a large amount of untreated industrial wastes. The World Bank claimed that in Bangladesh, approximately \$6.5 billion losses due to untreated water, which is 3.4% of the GDP in 2015. There are many factories and industries in our country. According to a Bangladeshi daily newspaper (The daily star), the textile industry will be discharging 203 billion liters of polluted water into the river's water every year from 2021. ETP is one of the best solutions to sanctify untreated water discharged by industries and factories. According to The daily star, currently, 5000 ETPs are initiated in factories and industries, which cover approximately 70% of the textile units [1]. It also said that Bangladesh has around 1,200 weaving mills, 5,000 export-oriented dyeing factories, and 450 spinning mills.

We will monitor the quality of water on the industrial water discharged site. To ensure whether the water is contaminated or not, we need real-time data analysis because the sample is continuously changing. If we want to monitor this water through the lab, then the cost will be high, and efficiency will be lower. In modern times, the wireless sensor network is used in many sectors. Wireless sensor networks have received considerable attention not only in environmental sectors but also in industrial sectors. WSN provides a massive advantage on cost because the installation and maintenance expenses are low, and the device that we use is cheaper, which required no writing. That's why environmental and industrial monitoring largely depends on WSN technology. We can apply this technology in water quality monitoring, which will provide us the best approach to real-time data acquisition, processing, and transmission. In this paper, we proposed a complete WSN water quality monitoring system which will allow us to monitor the ETP. This system consists of a set of sensors such as pH, temperature, turbidity, an Arduino Uno R3 microcontroller, GSM module, IoT based cloud server (Thingspeak). This system measures a different parameter of water, such as pH, temperature, and turbidity. In the results and discussion section, we proved that the system has a great prospect in industrial ETP plant monitoring. In this paper, section 2 discusses the literature survey on surveying water quality. Then section 3 illustrates the method we have implemented. After that, our data collection procedure is in section 4. Section 5 discusses the results obtained through this system and finally section 6 brings a conclusion.

## 2 Literature Survey

In this paper, our fundamental goal is to monitor the effluent treatment plant in real-time using a wireless sensor network. So, our primary concern is to examine water to determine the water quality parameters such as pH, temperature, and turbidity. The following papers proposed various methods to check the quality of water. Paper [2] delineate an efficient IoT based system for measuring water quality by determining temperature, pH, turbidity, and level of water. They use a temperature sensor, pH sensor, a turbidity sensor, a level sensor, an Arduino UNO Board. The data is transmitted to a webpage using GPS and GPRS modules. The webpage is showing results about the different parameter values of water. [3] Propose a smart sensor interface for industrial WSN in the IoT environment. They monitor water purity in the pond by using a light intensity sensor, digital temperature sensor, turbidity sensor by distributing multiple nodes in different areas. They use ZigBee wireless communication which is a short communication. [4] This paper claimed a cost-effective, low power transmission system for water quality monitoring in lakes around ANNABA reagent. They used different parameters like pH, conductivity, temperature, oxygen concentration, which is measured by different Arduino based sensors. They used a personal computer (PC) as a base station and developed a GUI using MatLab software for visualizing data. The gateway and base station is connected by the Xbee-pro module. Transmitted data is stored on a hard disk for future predictions. Using the GUI, user can examine water quality. Users will get alerted by alarm if water quality goes below standard. [5] This paper proposed a system to inspect the quality of water of Lake Victoria Basin (LVB) in real-time by checking water temperature, dissolved oxygen (DO), pH and electrical conductivity in real-time, using RF transceiver and GPS receiver for transmitting data in real-time. [6] This paper proposed a real-time water quality monitoring system for the River Nile, which situated in Egypt by measuring pH, turbidity, and temperature. They claimed that this system is much more cost-effective than current state-of-the-art multi-probe EXO, which measures the same parameters. They show a prototype which includes a temperature sensor, pH sensor, turbidity sensor, and Raspberry Pi and some communication technologies, dynamic website and mobile application for visualization. [7] proposed a Water Quality Monitoring System which uses a turbidity sensor, pH sensor, temperature sensor, and DO sensor, which are integrated into an Arduino Uno board. For transmitting and receiving values, they use the LoRa module, which uses the LoRa WAN protocol. They visualize their resulting data on the ThingSpeak IoT platform. [8] proposed a multi-parameter online monitoring system of water quality. Their work based on three fundamental blocks: the water quality monitoring stations, GPRS data transmission modem, and the monitoring station. They use A/D converter to convert the analog signal into a digital signal. To read digital data, they use IPC. The data sent through the GPRS modem to the monitoring station for analysis purposes. [9] proposed a WQM system in which the sensor nodes placed

within the river bed and data is transmitted to the base station using GPRS. They use Raspberry Pi over the SPI interface for interfacing ADC. They use two sensors, which are temperature sensor (DS18B20) and turbidity sensor. For enhancing efficiency, they use a one-wire communication protocol in temperature sensors. They create a MySQL based local server to display information that is transmitted by GPRS. [10] proposed a water quality monitoring process that uses an uncrewed aerial vehicle (UAV) robot, which got four propellers. This UAV robot is made of an ATmega 2560 microcontroller, a temperature sensor, a pH sensor, a water turbidity sensor, a GPS sensor, a dissolved oxygen sensor, a 3DR radio telemetry transmitter, and other accessories like four propellers for its moving purpose. Now this robot can transmit data in real-time with the range of a maximum of 1500 meters. They developed a GUI at the base station for visualizing the performance of different parameter values of water. [11] proposed a system that uses a pH sensing module, Arduino UNO Board, Temperature Sensing Module, and RF Module. This system got two main parts, which are sensor node and network gateway. Sensor Node transmits the pH value of water, and the network gateway receives those transmitted data. They use Arduino Ethernet Shield as IOT Module, which pushes data to cloud storage. An Android OS platform based mobile application is developed, which shows the latest Ph value, temperature, and time stamp. A GUI is developed to show the graphical interpretation of those data for visualizing. Finally, they compare the proposed system result with a standalone RFID system. [12] proposed how to optimize the energy and throughput of a water quality monitoring system. They use a sum throughput technique to present the joint maximization of energy harvest and information transmission rate where wireless information and power transfer are used to harvest the energy from radio frequency sources. [13] Proposed how to effectively monitor water quality. [14] They monitor water quality using Zigbee wireless communication. pH and turbidity sensors are used to determine whether water quality is good or bad. [15] They monitor flood and water quality using IoT. They combined various sensors such as weather monitoring, soil moisture monitoring, and fire alarm to implement their method. [16] They proposed a smart water quality monitoring system to prevent the contamination of the water. They build a monitoring center where data can be analyzed. For data transmission, they use the GPRS method. [17] They proposed a low cost and real-time water quality monitoring system which can be used in remote lakes and rivers and other water bodies areas. They use DO and pH sensor and also develop a mobile application to check the system efficiency. [18, 19, 20, 21] Proposed machine learning and deep learning methods to classify the water quality condition. They also calculate the water quality index from various sensors.

### 3 Materials and Methods

Wireless sensor networking is used to collect data about various applications, for example, residential security, surveillance, and ocean monitoring. The Internet of Things (IoT) motivates the rapid advancement of modern wireless telecommunication and expected to bring avails to a legionary number of application areas, including the industrial WSN systems. The proposed system, “IoT and WSN based Effluent Treatment Plant Monitoring System,” performs real-time water quality monitoring. This section represents the structure of WSN and IoT with their corresponding equipment. This system simply includes WSN sensor nodes, Microcontroller, and IoT platforms. Figure 1 expresses the simple way to monitor the water quality, where the wireless sensors module sent the data to the microcontroller module, and the microcontroller module sent the data to the central server.




Figure 1: Basic Diagram for Water Quality Monitoring System

#### 3.1. WSN Sensor Node

The sensor node plays the main role in our proposed WSN system. It is sorted with four sensors and microcontroller units. In this system, four sensors measure pH, temperature, turbidity, and flow, which determine the general characteristics of water. However, this method allows using more sensors depending on needs. The pH, temperature, and turbidity sensors are interfaced with the Arduino microcontroller to measure the water quality parameter values. Figure 1 shows the basic diagram of our proposed system, where Figure 2 shows the schematic diagram of the sensor node unit of this system. The sensors are connected to the Arduino Uno board to the correct pin, which ensures correct operation and gives the result of a different parameter value of water correctly.

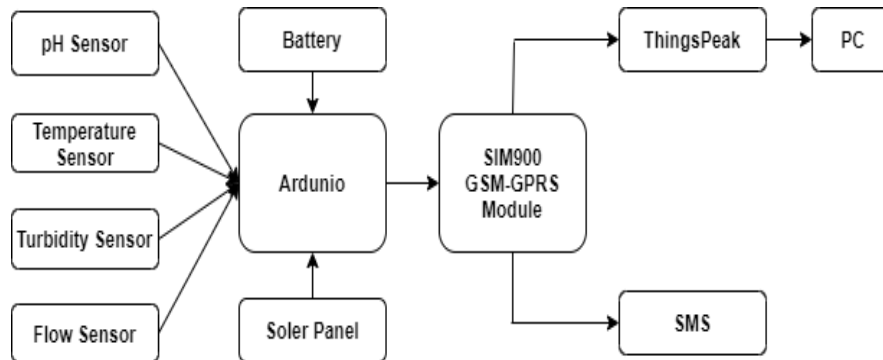


Figure 2: Real-Time Water Quality Monitoring System using WSN

### 3.1.1. pH Sensor

A pH sensor is a scientific device that is used to measure the hydrogen ion activity in water. pH sensor determines pH by measuring the voltage level or the difference of the solution in which it is immersed. The logarithmic scale of pH starts from 0 to 14. At level 7, we find the water source level is natural. When the level is less than seven, then the water has acidic solutions, and if the level is greater than seven, then the water has alkaline solutions. A pH sensor got two electrodes, which are measuring electrode and reference electrode. The positive end of the battery is paired with a measuring electrode, and a negative end is paired with a reference electrode. The reference electrode will not be changed because it always provides a fixed voltage when the pH meter is dipped into the solutions. The measuring electrode provides voltage and sensitivity to the hydrogen ion. If the temperature changes, then the differential voltage of the electrode also changes. Therefore we need a temperature sensor.

### 3.1.2. Turbidity Sensor

The turbidity sensor is the measurement of water transparency. It is used to measure total suspended solids (TSS) in water by sending the light beam into the water body. This light will then be flung by any suspended particles such as soil, silts, clay, which enter the water and affect the water body. A light detector is used to measure the amount of light that is being reflected back at it. Turbidity is measured in Nephelometric Turbidity Units, which is known as NTU. Turbidity values from the turbidity sensor can be higher or lower. Higher turbidity means there are lots of suspended solids in the water, and light can not pass through it, which means the water is impure. Lower turbidity means the water is pure because there are fewer suspended solids in the water, and light can easily pass through it.

### 3.1.3. Temperature Sensor

Temperature is measured through an electrical signal in the temperature sensor. As the voltage differences of electrodes change with temperature, a temperature sensor is needed. The correction for changing in voltage can also be done by this sensor. It requires RTD (Resistance Temperature Detectors) and a thermocouple. The RTD is a variable resistance which will change the electrical resistance indirectly proportional to the change in the temperature in a linear manner where the thermocouple is made by two dissimilar metals which are used to generate the electrical voltage indirectly proportional to the change in the temperature. For pure water temperature value is 27 degree Celsius. Table 1 represents the pH, temperature, and turbidity value and shows in which condition water is pure or polluted. The general guideline of pH, temperature, and turbidity value in pure water is suggested by WHO [22].

**Table 1.** WSN PARAMETERS VALUE

Parameter	Treated Water	Polluted Water
pH	6.5-8.5	<6.5 and >8.5
Temperature	50-72 F	<50 F and >72 F
Turbidity	<10 NTU	>0 NTU

### 3.1.4. Flow Meter

Flow meters measure how much water has gone across it. There are different types of flow meters. Among them, Krohne's electromagnetic flow meters can be used to measure both flow volume and flow rate. This flow meter consists of the sensor and converter where sensor consists of measuring tube, poles, induction coils, iron core, and shell. It works on the principle of Faraday's law of electromagnetic induction. Here digital pulses act as flow volume and can be paired with microcontroller using a digital I/O pin. We can set 2 flow meters in our proposed system. One in the discharging point of ETP and other in the discharging point of the water tank. Then we will compare the total amount of water passed through them. If their volume is significantly different, then an emergency SMS can be sent to the base station.

## 3.2. Microcontroller Module

Arduino Uno R3 used as a microcontroller module for this system, which includes a microcontroller and a C program that determines the behavior of the WSN sensor node. Arduino Uno R3 Microcontroller is a free platform that is flexible, convenient hardware and easy operable software which is used to acquire sensor data. Arduino Uno Board will analyze and process the data and send it to the server.



Whenever the pH value goes beyond the 6-8.5 range, Arduino will send an SMS to the authority via the GSM module. Similarly, whenever turbidity value goes beyond the range, as shown in Table 3, the GSM module will send a message about the status of the water quality to the authority.

### 3.3. SIM900 GSM-GPRS Module

A GSM or GPRS module is a circuit or chip which is used to establish a communication between a mobile device or a computer with a GSM or GPRS system. To send the sensors data from the Arduino to the pc, we need a GSM module that is compatible with the Arduino. It allows sending SMS via UART using AT commands. We can create a send SMS() function in the Arduino microcontroller board by using AT commands. This function uses the AT commands such as AT+CMGF=1 and AT +CMGS to send the SMS. A SIM-CARD is attached to the module and is used to send the message to the authority. This module can connect to the internet over the GPRS network. GPRS network provides moderate speed data transfer using unused time division multiple access (TDMA). SIM900 GSM-GPRS module can transfer sensors data from the Arduino to the IoT cloud server platform using HTTP POST-GET request.

### 3.4. IoT Platform

An IoT platform is a technology which got more than one layer. It communicates data between a hardware device and cloud storage. Currently, the IoT platform gives users a built-in feature, which makes easy to create the program applications for connected hardware devices, and it also takes care of the cross-device compatibility, data security, and scalability. Key technologies that are related to the IoT are sensor node technologies, including wireless sensor networks, miniaturization, and nano-technology [3]. As IoT is related to many wireless sensor devices, it produces a large number of data, which is also processed by IoT. Basically, IoT consists of three layers 1) Application layer 2) Network layer 3) Perception layer [3]. The data acquisition interface is designed by the perception layer of IoT, which includes sensors, cameras, RFID readers, and various data collection terminals [3]. The data acquisition interface plays a vital role in the collaboration and integration of environments and for collecting the sensor's data. Effluent Treatment Plant can be monitored by the water quality monitoring method. Water quality monitoring is one of the major IoT application fields because it adopts sensors to determine the water quality factor value and detect the pollution. That collection of sensors data can be transmitted to the IoT cloud server using the GSM module.

### 3.4.1. Thingspeak

There are so many IoT platforms that we can use to store, process, and analyze the sensor's data. Some of the IoT platforms are Microsoft Azure IoT, Amazon Web Service or AWS, Google Cloud Platform, Thingspeak, Thingworx, Cisco to IoT CloudConnect, etc. Among them for our method, we use the Thingspeak cloud server, which is an open data platform and API for the IoT, which will help you to store, collect, process, analyze and act on data from sensors. It is also user friendly and provides data security and free access to the cloud. The sensor node will send data to the cloud to store in the channel of Thingspeak. Thingspeak channel supports eight channels in which we use three channels, such as pH, Temperature, and turbidity. Through this process, we can analyze, visualize, and calculate new data and also interact with social media. The data are coming from the sensors organized in the cloud in the form of plots, charts, graphs using analytical tools online. Thingspeak also provides access to the MATLAB to provide sensor data. One can react both in new data and the raw data in each channel and also can help the devices to execute by using the commands. Thingspeak cloud server can send the data to the PC in an EXCEL form which is real-time. The collection of the sensor data in real-time is shown in the data collection section.

### 3.5. WSN Power Supply

In the WSN system, sensor nodes are situated at a remote distance. So the power supply becomes a major issue here. There are many methods to power the sensor node. Using a battery is one of them. But battery's energy is limited, and replacing batteries is not easy. Different energy harvesting methods like solar panels can be used to recharge the battery. This system uses a 3.7V 6 AH rechargeable polymerlithiumion battery, which is used to power the sensor nodes. This battery has a longer lifespan and also has an excellent self-discharge rate. We will use a solar panel in the future to recharge the battery so that it can save battery power.

### 3.6. WQI Calculation

A detailed method of WQI calculation can be found [23], but a brief discussion of this method can be found here. To evaluate water quality, we use the scale, which is proposed by Ramakrishnaiah et al. [24] that is shown in Table 2.

**Table 2.** Water quality scale based on WQI

Water Quality Class	WQI value
Excellent	<50
Good	50-100
Poor	100-200
Very poor	200-300
Unsuitable	>300

WQI can be calculated using the following equation (Brown et al.1970) [25]

$$WQI = \sum_{j=1}^n \frac{w_j q_j}{\sum w_j} \quad (1)$$

Where,

$w_j$ =unit weight of  $j$ th water quality parameters.

$q_j$ = Quality rating for the  $j$ th parameters.

For calculating the WQI, four steps are required.

Step 1: We have selected two variables pH and turbidity for calculating the WQI. We use the standard value of the water quality recommended by WHO [22].

Step 2: Quality rating( $q_j$ ) can be calculated using the following equation 2.

$$q_j = \frac{(V_a - V_i)}{(V_s - V_i)} \times 100 \quad (2)$$

Where,

$q_j$  =Quality rating for the  $j$ th water quality parameters

$V_a$  : The monitored value of the ( $j$ th) parameter at a given sampling station.

$V_i$  : ideal value for the  $j$ th parameters. For pH, the ideal values is 7.0 and for turbidity variable the ideal value is 0.

$V_s$  : the standard value of  $j$ th parameters.

Step 3: Unit weight ( $w_j$ ) can be calculated using the following equation 3.

$$w_j = \frac{K}{S_j}$$

Where,

$w_j$  : unit weight for the  $j$ th water quality parameters

$S_j$  : standards value for the  $j$ th water quality parameters

K: relative constant

Step 4: The calculated WQI values are classified into five groups. Good water quality is given a low range, and bad water quality is given high range of WQI value.

## 4 Results Analysis

In this section, we show how we collect sensors data from our experiment. We also show a hardware simulation of how the temperature, pH and turbidity sensors are connected to the Arduino Uno R3 board. For collecting the data from the sensor node, we use a Thingspeak IoT cloud server. The addition of the GSM module allows the system to be more robust and flexible. GSM module allows the sensors to send data to the IoT cloud server. The data collection procedure is shown in the Figure 3.

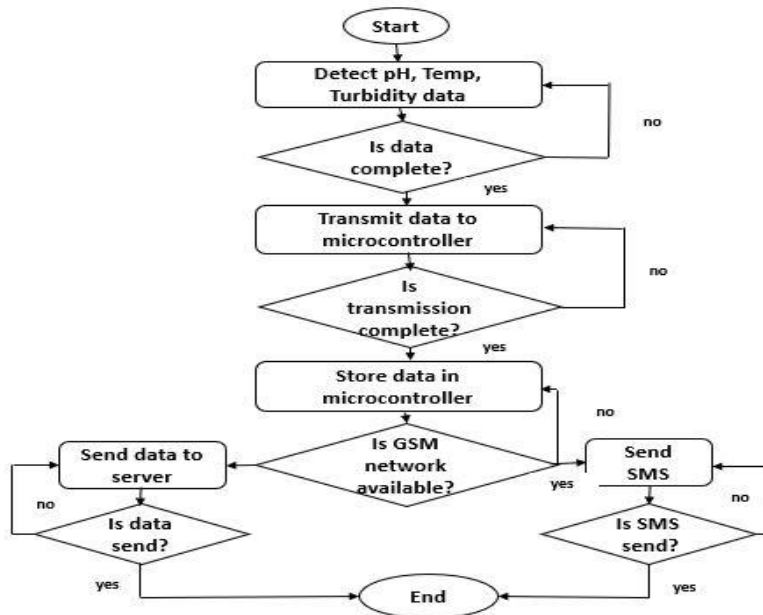


Figure 3: Data Collection Procedure.

The optimum pH range for treated and untreated water are shown in Table 1. IoT cloud server will send the data to the corresponding PC in real-time, which is shown in table 3.

**Table 3.** Experiment Value

created_at	entry_i	field 1	field 2	field 3	status
2020-01-24 11:41:00 +06	1	9.242	26.095	0	Treated
2020-01-24 11:46:00 +06	2	9.344	25.73	0	Treated
2020-01-24 11:51:00 +06	3	9.444	26.277	0	Treated
2020-01-24 11:56:00 +06	4	9.648	25.182	0	Treated
2020-01-24 12:01:00 +06	5	9.545	25.73	0	Treated
2020-01-24 12:06:00 +06	6	9.495	25.365	0	Treated
2020-01-24 12:11:00 +06	7	9.091	25.182	0	Treated
2020-01-24 12:16:00 +06	8	8.99	24.818	445	Untreated
2020-01-24 12:21:00 +06	9	8.889	24.635	620	Untreated
2020-01-24 12:26:00 +06	10	8.485	24.635	1942	Untreated
2020-01-24 12:31:00 +06	11	7.929	24.635	3	Treated
2020-01-24 12:36:00 +06	12	8.232	24.453	1093	Untreated
2020-01-24 12:41:00 +06	13	8.737	24.635	2204	Untreated
2020-01-24 12:46:00 +06	14	8.737	39.599	3036	Untreated
2020-01-24 12:51:00 +06	15	8.333	43.613	3004	Untreated
2020-01-24 12:56:00 +06	16	7.727	28.102	0	Treated
2020-01-24 13:01:00 +06	17	9.293	25.365	1518	Untreated
2020-01-24 13:06:00 +06	18	9.404	24.635	0	Treated
2020-01-24 13:11:00 +06	19	9.646	24.635	1685	Untreated

From this Table, we show that data is coming to the PC in real-time. The graphical representation of pH, temperature, and turbidity value is shown in the discussion section. For hardware simulation, we use Fritzing software, which is used primarily for performing schematic capture and allow us to simulate the circuit we design. Using Fritzing software, we simulate how the LM35 temperature sensor, SEN0161 pH meter, and SEN0189 turbidity sensor sends data to the ArduinoUno R3 board.

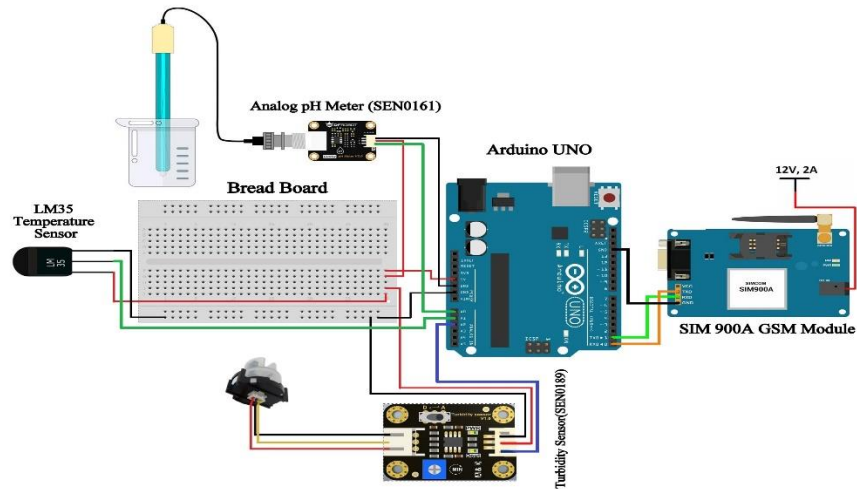


Figure 4: Hardware Simulation Process of Sensors.

The simulation process is shown in figure 4. In the simulation process, we connect the LM35 VCC pin to the +5V of the Arduino board. As the LM35 output pin produces analog data, so this pin is connected to the 'A1' pin of the Arduino Uno Board. This pin will allow receiving analog value from an exterior origin. The other pin is paired with the GND of the Arduino Uno board. Since pH and temperature sensors are also produced output as analog data, the pH sensor is connected to the 'A0' pin, and the turbidity sensor is connected to the 'A2' pin of the Arduino Uno Board. The other pin is connected to Arduino Uno as the LM35 temperature sensor is connected. We use a serial monitor from the Arduino IDE software in PC, which is used for checking the values of temperature, pH, and turbidity. The serial monitor looks like the LCD monitor, which is also used for showing the parameter values.


The calculated WQI values for some of the sample data are shown in Table 4. Comparing the result with our cloud status, it shows an excellent result. Although some of the cases can cause problems such as when the cloud server reports that the water quality is treated, but after calculating the WQI, we find that the quality of the water is very poor.

**Table 4.** WQI values for sample data

pH	Turbidity	WQI	Status
9.242	0	224	Very Poor
7.929	3	106	Poor
8.99	445	2177	Unsuitable
8.485	1942	8780	Unsuitable
7.727	0	73	Good
9.646	1685	7753	Unsuitable

## 5 Discussion

The proposed method can be implemented in the industry to check water quality in real-time. The results of the method are analyzed and discussed in the context of each scenario. Wireless sensor nodes act as a major role in the whole proposed system. Arduino Uno R3 collects the data from the sensor node. Here we developed a program and uploaded it to the microcontroller, which allows the system to collect data every 5 minutes. Once the data is calculated, the data is passed to the Thingspeak IoT cloud server using a GSM-GPRS model. IoT cloud server will send the data to the PC in real-time. The performance of the pH, temperature, and turbidity sensor data in the Thingspeak IoT cloud server is shown in Figure 5, 6, 7 which represents how data from the sensor node coming to the Thingspeak IoTcloud server in real-time.

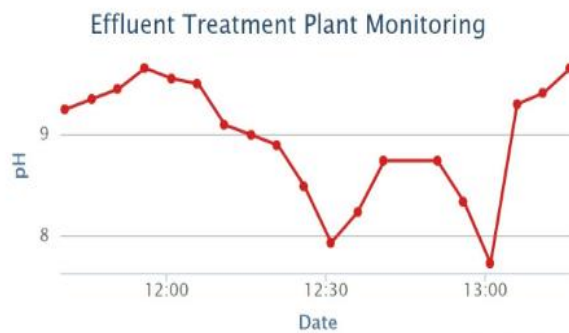

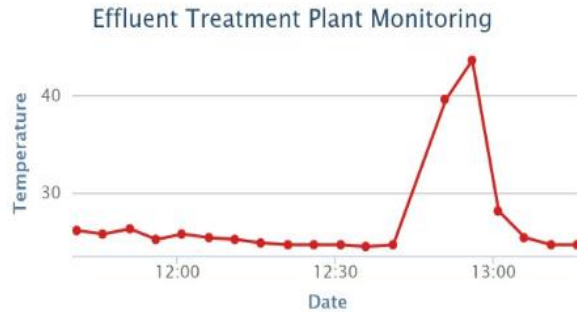


Figure 6: Temperature Data in Cloud.

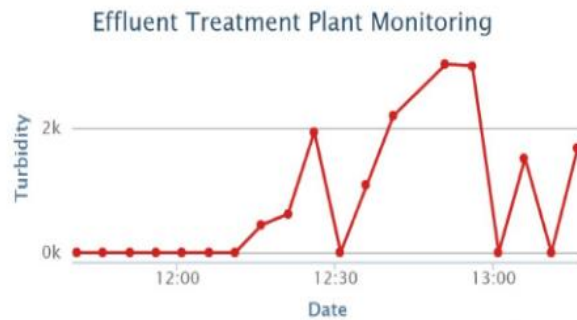


Figure 7: Turbidity Data in Cloud.

Compare to the other methods used for water quality monitoring, our method shows an excellent result and proved to be more effective. Here our fundamental goal was to monitor the ETP. To monitor the ETP, water quality monitoring is also required. Most of the method used previously is based on just water quality monitoring. In industry to monitor industry wastewater, it is completely a different scenario. Here we have to consider the environment and also calculate the value in real-time, but most of the methods like paper [2] [3] and [7], they use light intensity sensor or turbidity sensor for water quality monitoring. In our method, we use the turbidity sensor, which is more effective in the industry and shows the exact result. Another method like paper [7] they use an ESP32 Wi-Fi module to send the data to the IoT cloud server. For wifi module, it requires a router to get internet, which may not be possible in the industry. But in our proposed system, we use a GSM module where a SIM-CARD is attached. We can send data to the cloud using the GSM module easily. This IoT cloud server is connected to the internet, which uploaded the data into the PC. Using the data, the authority could easily monitor the quality of water. In our program, we also build an emergency situation, when the water quality crosses the danger limit, an



emergency SMS will be sent to the corresponding mobile phone. The status of the data is shown in the following Figure 8.



Figure 8: Status

The proposed system gives authorities the ability to check water quality parameters at the industrial water discharge site in real-time. Thus authority can easily monitor whether a particular industry discharged water is polluted or not.

## 6 Conclusion

In this work, our goal was to monitor the Effluent Treatment Plant using a wireless sensor network in real-time. This proposed system shows an approach for water quality monitoring using a wireless sensor network, which is automated, cost-effective, real-time, server-based, and more effective. We already demonstrated our field test result with appropriate calibration, which proves that the system can monitor water quality parameters tirelessly and send those data to the cloud server. Current procedures that are used in Bangladesh are expensive, non-real-time, and time-consuming. The problems that can affect our system are if the internet speed is slow, then the system will take time to send data. In the future, we will use machine learning to detect whether the water is clean or polluted. We will use more advanced software for our simulation purpose.

## References

- [1] M. A. Rabbi, J. Hossen, M. Sarwar, P. K. Roy, S. B. Sha-heed, M. M. Hasan, Investigation of waste water quality parameters discharged from textile manufacturing industries of bangladesh, *Current World Environment* 13 (2).
- [2] M. Parameswari, M. B. Moses, Efficient analysis of water quality measurement reporting system using IOT based system in WSN, *Cluster Computing* 22 (2019) 12193–12201.
- [3] Q. Chi, H. Yan, C. Zhang, Z. Pang, L. Da Xu, A reconfigurable smart sensor interface for industrial WSN in IoT environment, *IEEE transactions on industrial informatics* 10 (2014) 1417–1425.
- [4] A. Al-Dahoud, M. Fezari, H. Mehamdia, Water Quality Monitoring System Using WSN in Tanga Lake, in: *International Conference on Dependability and Complex Systems*, Annaba, Algeria, 2019, pp. 1–9.
- [5] A. Faustine, A. N. Mvuma, H. J. Mongi, M. C. Gabriel, A. J. Tenge, S. B. Kucel, Wireless Sensor Networks for Water Quality Monitoring and Control within Lake Victoria Basin, *Scientific Research Publishing Inc.* 6 (2014) 281–290.
- [6] N. Kamal, A. Hammad, T. Salem, M. Omar, EARLY WARNING AND WATER QUALITY, LOW-COST IOT BASED MONITORING SYSTEM, *Journal of Engineering Sciences Assiut University Faculty of Engineering* 47(2019) 796–808.
- [7] K. Simitha, S. Raj, IoT and WSN Based Water Quality Monitoring System, in: *2019 3rd International conference on Electronics, Communication and Aerospace Technology (ICECA)*, Coimbatore, India, 2019, pp. 205–210.
- [8] T.-z. Qiao, L. Song, The design of multi-parameter online monitoring system of water quality based on GPRS, in: *2010 International Conference on Multimedia Technology*, Ningbo, China, 2010, pp. 1–3.
- [9] S. Doshi, S. Dube, Wireless Sensor Network to Monitor River Water Impurity, in: *International Conference on Computer Networks and Communication Technologies*, Pune, India, 2019, pp. 809–817.
- [10] B. Etikasari, S. Kautsar, H. Riskiawan, D. Setyohadi, et al., Wireless sensor network development in unmanned aerial vehicle (uav) for water quality monitoring system, in: *IOP Conference Series: Earth and Environmental Science*, Politeknik Negeri Jember, Indonesia, 2020, p.012061.
- [11] K. H. Kamaludin, W. Ismail, Water quality monitoring with internet of things (IoT), in: *2017 IEEE Conference on Systems, Process and Control (ICSPC)*, Melaka, Malaysia, 2017, pp. 18–23.
- [12] S. O. Olatinwo, T.-H. Joubert, Optimizing the energy and throughput of a water-quality monitoring system, *Sensors* 18 (2018) 1198.

- [13] T. I. Salim, H. S. Alam, R. P. Pratama, I. A. F. Anto, A. Munandar, Portable and online water quality monitoring system using wireless sensor network, in: 2017 2nd International Conference on Automation, Cognitive Science, Optics, Micro Electro-Mechanical System, and Information Technology (ICACOMIT), Jakarta, Indonesia.
- [14] V. Suryawanshi, M. Khandekar, Design and development of wireless sensor network (wsn) for water quality monitoring using zigbee, in: 2018 Second International Conference on Intelligent Computing and Control Systems (ICICCS), Madurai, India.
- [15] S. Jegadeesan, M. Dhamodaran, S. Sri Shanmugapriya, Wireless sensor network based flood and water quality monitoring system using iot, *Taga journal of graphic technology*, Online ISSN.
- [16] L. N. Devi, G. K. Reddy, A. N. Rao, Live demonstration on smart water quality monitoring system using wireless sensor networks, in: 2018 IEEE SENSORS, New Delhi, India, 2018, pp. 1–4.
- [17] A. T. Demetillo, M. V. Japitana, E. B. Taboada, A system for monitoring water quality in a large aquatic area using wireless sensor network technology, *Sustainable Environment Research* 29 (12).
- [18] U. Ahmed, R. Mumtaz, H. Anwar, A. A. Shah, R. Irfan, J. García-Nieto, Efficient water quality prediction using supervised machine learning, *Water* 11 (2019) 2210.
- [19] S. Hafeez, M. S. Wong, H. C. Ho, M. Nazeer, J. Nichol, S. Abbas, D. Tang, K. H. Lee, L. Pun, Comparison of machine learning algorithms for retrieval of water quality indicators in case-ii waters: a case study of hong kong, *Remote sensing* 11 (2019) 617.
- [20] R. Mohammadpour, S. Shaharuddin, C. K. Chang, N. A. Zakaria, A. Ab Ghani, N. W. Chan, Prediction of water quality index in constructed wetlands using support vector machine, *Environmental Science and Pollution Research* 22 (2015) 6208–6219.
- [21] R. Barzegar, M. T. Aalami, J. Adamowski, Short-term water quality variable prediction using a hybrid cnn-lstm deep learning model, *Stochastic Environmental Research and Risk Assessment* (2020) 1–19.
- [22] Guidelines for drinking-water quality, third edition Edition, World Health Organization, Geneva, 2004.
- [23] M. Kachroud, F. Trolard, M. Kefi, S. Jebari, G. Bourrié, Water quality indices: Challenges and application limits in the literature, *Water* 11 (2019) 361.
- [24] C. Ramakrishnaiah, C. Sadashivaiah, G. Ranganna, Assessment of water quality index for the ground water in tumkur taluk, karnataka state, india, *Journal of Chemistry* 6 (2009) 523–530.

[25] R. M. Brown, N. I. McClelland, R. A. Deininger, R. G. Tozer, A water quality index- do we dare.